



SLOKY®



Torque Screwdriver

Cat.04

sloky.jic-tools.com.tw





About Us



Adapter

0-TPK-A



01

Handle

0-TPK-H01
0-TPK-H02
0-TPK-H03

Universal Handle
Slim-Fit Handle
T Flying Handle



03

Bits

0-TPK-B01
0-TPK-B02
0-TPK-B03

TORX®
TORX PLUS®
HEXAGON

25mm | 50mm | 75mm
25mm | 50mm | 75mm
25mm | 50mm



05

NEW

Pro Station

0-TPK26-PR

TORX®
TORX PLUS®
HEXAGON

50mm bits
50mm bits
50mm bits



09



Contents

Togo Kit
0-TPK01
0-TPK02

TORX®
TORX PLUS®

25mm+50mm bits
25mm+50mm bits



10

Work Station
0-TPK01
0-TPK02

TORX®
TORX PLUS®

25mm+50mm bits
25mm+50mm bits



Smart Kit
0-TPK01

TORX®

25mm bits



11

Single Set
0-TPK01

TORX®

25mm+50mm bits



Single Set
0-TPK02

TORX PLUS®

25mm+50mm bits



12

Single Set
0-TPK03

HEXAGON

25mm+50mm bits



Accessories



13

User Guide



14

About Us

“SLOKY®” comes from the meaning of “SOLO KEY” in Taiwanese dialogue.

It is defined from the position of patented adapter in torque screwdriver system as a solo performer.

Patented adapter plays as a solo performer, with a unique feature to build whole product system. The torque's value is setting on the adapter; complied with various bits and handles become torque screwdrivers for tighten or loosen the screw.


Sloky torque screwdriver, a predicable, replaceable and organized tool.

It is considering to be used in industrial field having a greatest advantage of “no-over tighten”.

It prevents the damages of the screw and tool, in addition it provides a replaceable function to fit with driver bits having different shape and dimensions.



SLOKY®

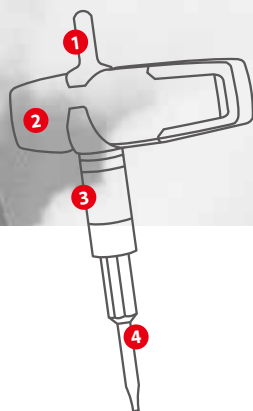

- ✓ 1. Fasten or loosen the screws quickly
- ✓ 2. Ergonomically refined design
- ✓ 3. Torque accuracy $\pm 10\%$
- ✓ 4. Color recognition

Predictable




- When the demand torque is reached, there is a click sound. For continued tightening on the screw, it is no longer to increase the torque on the screw.
- It has a reversible system to use the same screwdriver for tightening and loosening the screw.
- The limit of loosening torque is larger than the tightening torque to protect both tool and the screw from the breaking or damage.

*High efficiency
High quality
Highlight of Product*

Replaceable



- Not only the bit, the torque adapter is also replaceable.
- Light and precise! Ideal as economic torque screwdriver.
- Fitting with a universal handle, the most compact size of torque screwdriver in the world is built.
- The cost of the torque adapter is lower in comparison with other brands.
- Different torque value preset adapter is available on request.

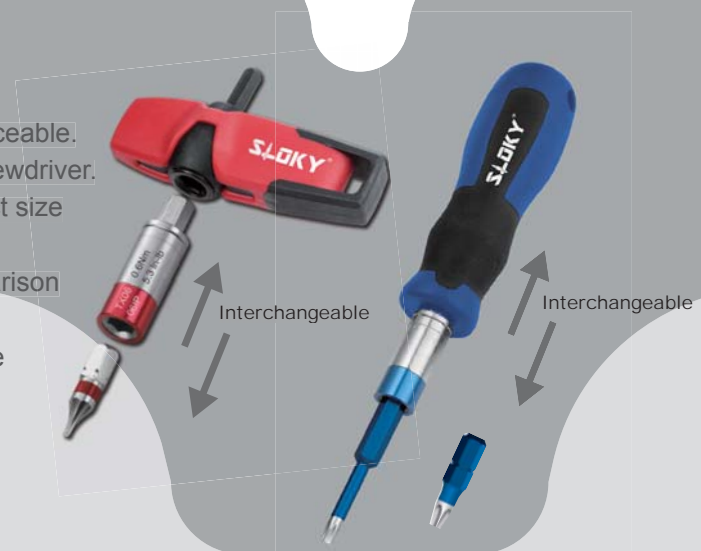

Organized



- Persisting highest quality to supply SLOKY products and services to meet customer's satisfactions.
- Accomplishing customer's requirements by professional technology.



Adapter

Principle

"No- over tighten" adapter is created from the non-return ratchet torque socket. It comprised a shaft rod and a shaft cylinder.


A core shaft of shaft rod is sleeved with a mobile ratchet capable of axially moving; the shaft cylinder has a shaft slot formed for being sleeved with the core shaft.

When the core shaft rotates in the shaft slot and the applied torque exceeds the preset torque value, the core shaft idly rotates in the shaft slot.

It means when the demand torque is reached, continued tightening is no longer to increase the torque on the screw.



✓ 20,000 times product life test

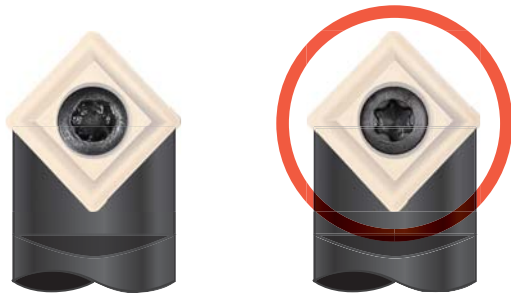


Used Screwdriver
Without Torque

Used Screwdriver
With Torque

Material : Carbon Steel
Hardness : HRC 43° ~ 48°
Surface Treatment : Electroless Nickel
Unit conversion : 1 Nm = 10.20kgf-cm

Installed with magnet

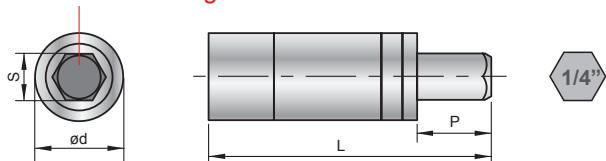

Adapter

Your own exclusive kit

Choosing any 12 adapters
to create your own Torque Kit.

Part No.: 0-TPK12-EX (MOQ:3 kits)



Parts No.	Ød (mm)	S (mm)	P (mm)	L (mm)	Nm	KgfcM	In-lb	Q'TY	N.W.	Packaging Illustration
0-TPK-A06-0.6	12	6.35	10	38.3	0.6	6.1	5.3	3 pcs		
0-TPK-A07-0.9	12	6.35	10	38.3	0.9	9.2	8.0	3 pcs		
0-TPK-A08-1.2	12	6.35	10	38.3	1.2	12.0	10.6	3 pcs		
0-TPK-A08-2.0	12	6.35	10	38.3	2.0	20.4	17.7	3 pcs		
0-TPK-A09-1.4	12	6.35	10	38.3	1.4	14.0	12.4	3 pcs		
0-TPK-A09-2.0	12	6.35	10	38.3	2.0	20.4	17.7	3 pcs	80g	
0-TPK-A10-2.0	12	6.35	10	38.3	2.0	20.4	17.7	3 pcs		
0-TPK-A15-3.0	12	6.35	10	38.3	3.0	30.6	26.6	3 pcs		
0-TPK-A20-5.0	12	6.35	10	38.3	5.0	51.0	44.3	3 pcs		
0-TPK-A20-5.5	12	6.35	10	38.3	5.5	56.1	48.7	3 pcs		
0-TPK-A25-5.5	12	6.35	10	38.3	5.5	56.1	48.7	3 pcs		

Parts No.	Ød (mm)	S (mm)	P (mm)	L (mm)	Nm	KgfcM	In-lb	Q'TY	N.W.	Packaging Illustration
0-TPK-A00-2.5	12	6.35	10	38.3	2.5	25.5	22.1	3 pcs		
0-TPK-A00-3.8	12	6.35	10	38.3	3.8	38.7	33.6	3 pcs		
0-TPK-A00-4.0	12	6.35	10	38.3	4.0	40.8	35.4	3 pcs		
0-TPK-A00-4.5	12	6.35	10	38.3	4.5	45.9	39.8	3 pcs	80g	

• Special torque adapter is available on request, from 0.1Nm~18Nm by different adapter size.

⚠ This product is only suitable for manual operation. Do not apply with other electric tools or power tools.

Handle

Features

We offer **3** different types of handle for your options.

The soft zone is comfortable to hold and play very flexible.
Easy to tighten and loosen screws even in higher torque range.

The outstanding design of the SLOKY handle that fits perfectly into the hand and prevents the hand injuries such as blisters and calluses.

The ergonomic design of the handle



Universal Handle

Features :

- Universal type for holding in multi-ways.
- Having large support surfaces for thumb and index finger ease of using and efficiency.
- Remaining the advantages of flag design, driving the screw easily.




Fig	Parts No.	Suit For Torque	Color	S (mm)	L (mm)	H (mm)	Ød (mm)	N.W.
1	0-TPK-H01	0.6~5.5 Nm	Red	6.35	37.5	70.7	5	25g
	0-TPK-H01-B		Blue					

Slim-Fit Handle

Features :

- Slim fit for comfortable holding, for accurate and efficient while fastening and loosening small sizes screws

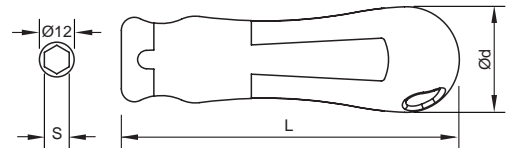


Fig	Parts No.	Suit For Torque	Color	S (mm)	L (mm)	Ød (mm)	N.W.
2	0-TPK-H02	0.6~2.0 Nm	Red	6.35	104	32.5	50g
	0-TPK-H02-B		Blue				

T Flying Handle

Features :

- It is light, even it is designed for higher torque.
- The striking soft zone that allows particularly comfortable, best handle for using at higher torque.





Fig	Parts No.	Suit For Torque	Color	S (mm)	L (mm)	H (mm)	N.W.
3	0-TPK-H03	3.0~5.5 Nm	Red	6.35	65	100	60g
	0-TPK-H03-B		Blue				

Choose handle for different torque range

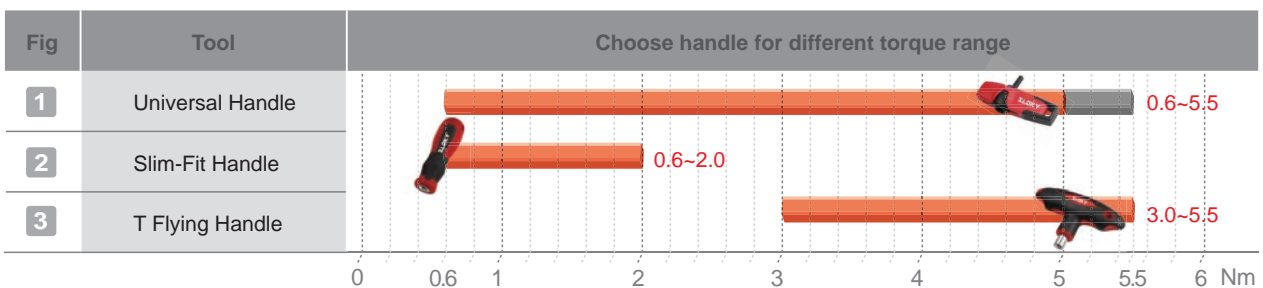

Bits

Color Identity

No mistake!

The color identification is visible on both adapters and bits.

Select suitable torque size by color management system indicated on torque adapters and bits.

It is to enhance the convenience of using and delivery proper tightening torque.



TORX®



TORX PLUS®



HEXAGON

TX20 / 20IP / H4
TX25 / 25IP / H5

TX15 / 15IP / H3

TX10 / 10IP / H2.5

TX9 / 9IP

TX8 / 8IP / H2

TX7 / 7IP

TX6 / 6IP / H1.5



✓ Tools created from ideas

Spare


25mm Bits for TORX® screws

Hardness : HRC 58° ~60°

Material : High alloy steel

Standard : DIN3126 – C6.3 (1/4")

- TORX® drive between tool and screw by line or surface contact rather than point contact.
- It also increases the amount of torque and force that can be transferred.




Parts No.	Driver Size	L (mm)	Q'TY	N.W.	Packaging Illustration
0-TPK-B01-TX06-25	TX6	25	6 pcs	32 g	
0-TPK-B01-TX07-25	TX7	25	6 pcs	32 g	
0-TPK-B01-TX08-25	TX8	25	6 pcs	32 g	
0-TPK-B01-TX09-25	TX9	25	6 pcs	32 g	
0-TPK-B01-TX10-25	TX10	25	6 pcs	32 g	
0-TPK-B01-TX15-25	TX15	25	6 pcs	34 g	
0-TPK-B01-TX20-25	TX20	25	6 pcs	34 g	

50mm Bits for TORX® screws

Hardness : HRC 58° ~60°

Material : High alloy steel

Standard : Similar to DIN3126 – C6.3 (1/4")




Parts No.	Driver Size	L (mm)	Q'TY	N.W.	Packaging Illustration
0-TPK-B01-TX06-50	TX6	50	6 pcs	54 g	
0-TPK-B01-TX07-50	TX7	50	6 pcs	54 g	
0-TPK-B01-TX08-50	TX8	50	6 pcs	54 g	
0-TPK-B01-TX09-50	TX9	50	6 pcs	56 g	
0-TPK-B01-TX10-50	TX10	50	6 pcs	58 g	
0-TPK-B01-TX15-50	TX15	50	6 pcs	60 g	
0-TPK-B01-TX20-50	TX20	50	6 pcs	62 g	
0-TPK-B01-TX25-50	TX25	50	6 pcs	62 g	

75mm Bits for TORX® screws

Hardness : HRC 58° ~60°

Material : High alloy steel

Standard : Similar to DIN3126 – C6.3 (1/4")



Parts No.	Driver Size	L (mm)	Q'TY	N.W.	Packaging Illustration
0-TPK-B01-TX08-75	TX8	75	6 pcs	58 g	
0-TPK-B01-TX09-75	TX9	75	6 pcs	64 g	
0-TPK-B01-TX10-75	TX10	75	6 pcs	70 g	
0-TPK-B01-TX15-75	TX15	75	6 pcs	70 g	
0-TPK-B01-TX20-75	TX20	75	6 pcs	78 g	
0-TPK-B01-TX25-75	TX25	75	6 pcs	88 g	

TORX® and TORX PLUS® are registered trademarks of Acument Global Technologies.



- Larger contact surface between tool and screw
- The line of effective force is in the direction of movement (direction of rotation).

Spare

Bits


TORX PLUS®

25mm Bits for TORX PLUS® screws

Hardness : HRC 58° ~60°

Material : High alloy steel

Standard : DIN3126 – C6.3 (1/4")




Parts No.	Driver Size	L (mm)	Q'TY	N.W.	Packaging Illustration
0-TPK-B02- 6IP-25	6IP	25	6 pcs	32 g	
0-TPK-B02- 7IP-25	7IP	25	6 pcs	32 g	
0-TPK-B02- 8IP-25	8IP	25	6 pcs	32 g	
0-TPK-B02- 9IP-25	9IP	25	6 pcs	32 g	
0-TPK-B02-10IP-25	10IP	25	6 pcs	32 g	
0-TPK-B02-15IP-25	15IP	25	6 pcs	34 g	
0-TPK-B02-20IP-25	20IP	25	6 pcs	34 g	

50mm Bits for TORX PLUS® screws

Hardness : HRC 58° ~60°

Material : High alloy steel

Standard : Similar to DIN3126 – C6.3 (1/4")




Parts No.	Driver Size	L (mm)	Q'TY	N.W.	Packaging Illustration
0-TPK-B02- 6IP-50	6IP	50	6 pcs	54 g	
0-TPK-B02- 7IP-50	7IP	50	6 pcs	54 g	
0-TPK-B02- 8IP-50	8IP	50	6 pcs	54 g	
0-TPK-B02- 9IP-50	9IP	50	6 pcs	56 g	
0-TPK-B02-10IP-50	10IP	50	6 pcs	58 g	
0-TPK-B02-15IP-50	15IP	50	6 pcs	60 g	
0-TPK-B02-20IP-50	20IP	50	6 pcs	62 g	
0-TPK-B02-25IP-50	25IP	50	6 pcs	66 g	

75mm Bits for TORX PLUS® screws

Hardness : HRC 58° ~60°


Material : High alloy steel

Standard : Similar to DIN3126 – C6.3 (1/4")



Parts No.	Driver Size	L (mm)	Q'TY	N.W.	Packaging Illustration
0-TPK-B02- 8IP-75	8IP	75	6 pcs	64 g	
0-TPK-B02- 9IP-75	9IP	75	6 pcs	66 g	
0-TPK-B02-10IP-75	10IP	75	6 pcs	72 g	
0-TPK-B02-15IP-75	15IP	75	6 pcs	72 g	
0-TPK-B02-20IP-75	20IP	75	6 pcs	78 g	
0-TPK-B02-25IP-75	25IP	75	6 pcs	86 g	

TORX® and TORX PLUS® are registered trademarks of Acument Global Technologies.

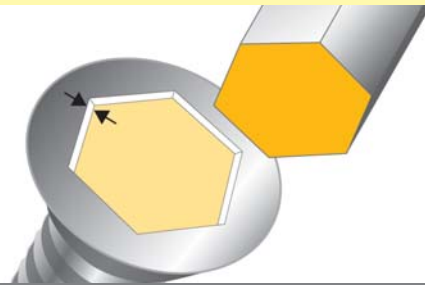


• Screwdriver bit with external hexagon profile.

Spare

25mm Bit for Hexagon screws


Hardness : HRC 58° ~ 60°
 Material : High alloy steel
 Standard : DIN3126 – C6.3 (1/4")



Parts No.	Driver Size	H (mm)	G (mm)	L (mm)	Q'TY	N.W.	Packaging Illustration
0-TPK-B03-H015-25	H1.5	1.5	2.3	25	6 pcs	32 g	
0-TPK-B03-H020-25	H2	2.0	3.0	25	6 pcs	32 g	
0-TPK-B03-H025-25	H2.5	2.5	3.8	25	6 pcs	33 g	
0-TPK-B03-H030-25	H3	3.0	4.5	25	6 pcs	34 g	
0-TPK-B03-H040-25	H4	4.0	6.0	25	6 pcs	36 g	
0-TPK-B03-H050-25	H5	5.0	7.5	25	6 pcs	40 g	

50mm Bit for Hexagon screws

Hardness : HRC 58° ~ 60°
 Material : High alloy steel
 Standard : DIN3126 – E6.3 (1/4")



Parts No.	Driver Size	H (mm)	G (mm)	I (mm)	L (mm)	Q'TY	N.W.	Packaging Illustration
0-TPK-B03-H015-50	H1.5	1.5	2.3	25	50	6 pcs	50 g	
0-TPK-B03-H020-50	H2	2.0	3.0	25	50	6 pcs	51 g	
0-TPK-B03-H025-50	H2.5	2.5	3.8	25	50	6 pcs	54 g	
0-TPK-B03-H030-50	H3	3.0	4.5	25	50	6 pcs	57 g	
0-TPK-B03-H040-50	H4	4.0	6.0	25	50	6 pcs	64 g	
0-TPK-B03-H050-50	H5	5.0	7.5	25	50	6 pcs	72 g	

NEW

Pro Station



Parts No.: 0-TPK26-PR-22K

Torque Screwdriver Kit for TORX® TORX PLUS® Hexagon , 50mm Bits

Handle	Contents										N.W.
	Adapter				50mm Bits for TORX®		50mm Bits for TORX PLUS®		50mm Bits for HEXAGON		
	Nm	KgfcM	In-lb	Q'TY	Size	Q'TY	Size	Q'TY	Size	Q'TY	
 TPK-H02-B	0.6	6.1	5.3	1PC	TX6	1PC	6IP	1PC	H1.5	1PC	1600g
	0.9	9.2	8.0	1PC	TX7	1PC	7IP	1PC	-	-	
	1.2	12.0	10.6	1PC	TX8	1PC	8IP	1PC	H2	1PC	
 TPK-H01-B	1.4	14.0	12.4	1PC	TX9	1PC	9IP	1PC	-	-	
	2.0	20.4	17.7	1PC	TX10	1PC	10IP	1PC	H2.5	1PC	
	3.0	30.6	26.6	1PC	TX15	1PC	15IP	1PC	H3	1PC	
 TPK-H03-B	5.0	51.0	44.3	1PC	TX20	1PC	20IP	1PC	H4	1PC	
	5.5	56.1	48.7	1PC	TX25	1PC	25IP	1PC	H5	1PC	

STAND   

Parts No.: 0-TPK26-PR

N.W.: 1000g

Base made of Aluminum Alloy , Silver Coating.



Click sound

- Let <CLICK> tell you when the torque is reached !
- Quick release !

Rapid-out

- Simply pull the bit outward to change new bit.
- Perfect positioning in the bits.

Color recognition

- The color identification is visible on both adapters and bits.

KEEP YOUR SCREW SAFE


INNOVATION

Patented in multi-country:


TW / M439546
 CN / ZL201220320077.3
 US / 13/310,766
 DE / 102012005885.3
 JP / 3174153

Togo Kit

Torque Screwdriver Kit for TORX®, 25mm+50mm Bits


Parts No.	Contents						N.W.	Packaging Illustration
	Handle	Adapter				Bit		
		Size	Nm	KgfcM	In-lb	25mm+50mm		
0-TPK01-TGTX-12K	TPK-H02	TX6	0.6	6.1	5.3	1 pc + 1 pc	445g	
		TX7	0.9	9.2	8.0	1 pc + 1 pc		
		TX8	1.2	12.0	10.6	1 pc + 1 pc		
	TPK-H01	TX9	1.4	14.0	12.4	1 pc + 1 pc		
		TX10	2.0	20.4	17.7	1 pc + 1 pc		
		TX15	3.0	30.6	26.6	1 pc + 1 pc		

Torque Screwdriver Kit for TORX PLUS®, 25mm+50mm Bits


Parts No.	Contents						N.W.	Packaging Illustration
	Handle	Adapter				Bit		
		Size	Nm	KgfcM	In-lb	25mm+50mm		
0-TPK02-TGIP-12K	TPK-H02-B	6IP	0.6	6.1	5.3	1 pc + 1 pc	445g	
		7IP	0.9	9.2	8.0	1 pc + 1 pc		
		8IP	1.2	12.0	10.6	1 pc + 1 pc		
	TPK-H01-B	9IP	1.4	14.0	12.4	1 pc + 1 pc		
		10IP	2.0	20.4	17.7	1 pc + 1 pc		
		15IP	3.0	30.6	26.6	1 pc + 1 pc		

Work Station

Torque Screwdriver Kit for TORX®, 25mm+50mm Bits

Parts No.	Contents						N.W.	Packaging Illustration
	Handle	Adapter				Bit		
		Size	Nm	KgfcM	In-lb	25mm+50mm		
0-TPK01-PR-12	TPK-H02	TX6	0.6	6.1	5.3	1 pc + 1 pc	855g	
		TX7	0.9	9.2	8.0	1 pc + 1 pc		
		TX8	1.2	12.0	10.6	1 pc + 1 pc		
	TPK-H01	TX9	1.4	14.0	12.4	1 pc + 1 pc		
		TX10	2.0	20.4	17.7	1 pc + 1 pc		
		TX15	3.0	30.6	26.6	1 pc + 1 pc		


Torque Screwdriver Kit for TORX PLUS®, 25mm+50mm Bits

Parts No.	Contents						N.W.	Packaging Illustration
	Handle	Adapter				Bit		
		Size	Nm	KgfcM	In-lb	25mm+50mm		
0-TPK02-PR-12	TPK-H02-B	6IP	0.6	6.1	5.3	1 pc + 1 pc	855g	
		7IP	0.9	9.2	8.0	1 pc + 1 pc		
		8IP	1.2	12.0	10.6	1 pc + 1 pc		
	TPK-H01-B	9IP	1.4	14.0	12.4	1 pc + 1 pc		
		10IP	2.0	20.4	17.7	1 pc + 1 pc		
		15IP	3.0	30.6	26.6	1 pc + 1 pc		

TORX® and TORX PLUS® are registered trademarks of Acument Global Technologies.




⚠ This product is only suitable for manual operation. Do not apply with other electric tools or power tools.

Smart Kit Torque Screwdriver Kit for TORX®, 25mm Bits

Parts No.	Contents						N.W.	Metric Screw	Packaging Illustration
	Handle	Adapter				Bit			
		Size	Nm	KgfcM	In-lb	25mm			
0-TPK01-99-06K	TPK-H01	TX6	0.6	6.1	5.3	1pc	290g	M1.8 M2	
		TX7	0.9	9.2	8.0	1pc		M2 M2.2	
		TX8	1.2	12.0	10.6	1pc		M2.2 M2.5	
		TX9	2.0	20.4	17.7	1pc		M3 M3.5	
		TX15	3.0	30.6	26.6	1pc		M3.5 M4	
		TX20	5.5	56.1	48.7	1pc		M5 M5.5	

Single Set

Torque Screwdriver Single Set for TORX®, 25mm+50mm Bits

Parts No.	Contents						N.W.	Packaging Illustration
	Handle	Adapter			Bit			
		Nm	KgfcM	In-lb	Size	25mm+50mm		
0-TPK01-TX06-0.6-S	TPK-H02	0.6	6.1	5.3	TX6	2 pcs + 2 pcs	122g	
0-TPK01-TX07-0.9-S		0.9	9.2	8.0	TX7	2 pcs + 2 pcs		
0-TPK01-TX08-1.2-S		1.2	12.0	10.6	TX8	2 pcs + 2 pcs		
0-TPK01-TX08-2.0	TPK-H01	2.0	20.4	17.7	TX8	2 pcs + 2 pcs	130g	
0-TPK01-TX09-1.4		1.4	14.0	12.4	TX9	2 pcs + 2 pcs		
0-TPK01-TX09-2.0		2.0	20.4	17.7		2 pcs + 2 pcs		
0-TPK01-TX10-2.0		2.0	20.4	17.7	TX10	2 pcs + 2 pcs		
0-TPK01-TX15-3.0		3.0	30.6	26.6	TX15	2 pcs + 2 pcs		
0-TPK01-TX20-5.0		5.0	51.0	44.3	TX20	2 pcs + 2 pcs		
0-TPK01-TX20-5.5	5.5	56.1	48.7	TX20	2 pcs + 2 pcs	200g		
0-TPK01-TX2025-5.5	TPK-H03	5.5	56.1	48.7	Bit 50mm			
					TX20			2 pcs
					TX25	2 pcs		

TORX® and TORX PLUS® are registered trademarks of Acument Global Technologies.

 This product is only suitable for manual operation. Do not apply with other electric tools or power tools.

Single Set

Torque Screwdriver Single Set for TORX PLUS®, 25mm+50mm Bits

Parts No.	Contents						N.W.	Packaging Illustration
	Handle	Adapter			Bit			
		Nm	KgfcM	In-lb	Size	25mm+50mm		
0-TPK02- 6IP-0.6-S	TPK-H02-B	0.6	6.1	5.3	6IP	2 pcs + 2 pcs	130g	
0-TPK02- 7IP-0.9-S		0.9	9.2	8.0	7IP	2 pcs + 2 pcs		
0-TPK02- 8IP-1.2-S		1.2	12.0	10.6	8IP	2 pcs + 2 pcs		
0-TPK02- 9IP-1.4	TPK-H01-B	1.4	14.0	12.4	9IP	2 pcs + 2 pcs	130g	
0-TPK02-10IP-2.0		2.0	20.4	17.7	10IP	2 pcs + 2 pcs		
0-TPK02-15IP-3.0		3.0	30.6	26.6	15IP	2 pcs + 2 pcs		
0-TPK02-20IP-5.0		5.0	51.0	44.3	20IP	2 pcs + 2 pcs		
0-TPK02-2025IP-5.5	TPK-H03-B	5.5	56.1	48.7	Bit 50mm		200g	
					20IP	2 pcs		
					25IP	2 pcs		

Torque Screwdriver Single Set for Hexagon , 25mm+50mm Bits

Parts No.	Contents						N.W.	Packaging Illustration
	Handle	Adapter			Bit			
		Nm	KgfcM	In-lb	Size	25mm+50mm		
0-TPK03-H020-1.2	TPK-H02	1.2	12.0	10.6	H2	2 pcs + 2 pcs	150g	
0-TPK03-H025-2.0	TPK-H01	2.0	20.4	17.7	H2.5	2 pcs + 2 pcs	135g	
0-TPK03-H030-3.0		3.0	30.6	26.6	H3			
0-TPK03-H040-5.0	TPK-H03	5.0	51.0	44.3	Bit 50mm		200g	
					H4	4 pcs		

TORX® and TORX PLUS® are registered trademarks of Acument Global Technologies.

This product is only suitable for manual operation. Do not apply with other electric tools or power tools.

Accessories

Torque Analyzer (Made in Japan)



Model No.		CD-100M
Measuring Range	N-m	0.10~10.00
	kgf-cm	1.0~100.0
	lbf-in	1.0~90.0
Accuracy		±0.5% (199 or less digit ± 1 digit)
Display		The 3.5 figures digital display of LCD
Measurement Mode	P-P	The maximum under measurement is always displayed.
	T-R	The value of the load torque concerning a detector is displayed as it is.
	P-D	A value when a load torque value changes from a rise to descent is displayed.
Transmission interface		USB (Baud rate : 19200)
Auto Power Off		Power-supply OFF is carried out after the neglect during 10 minutes.
Battery		Ni-cd battery : 1.2V/5sells (700mAh)
Charge time / Use time		About 3 hours / About 12 hours use consecutive at full charge time
Size / Weight		160(W) X 125(D) X 55(H)mm / 1kg
Measurement Joint	Spec.	SJ-50
	Measurement Range	0.5--5N-m

Why the torque may get low after use a certain time?

The torque adapter is functional by the radial direction friction; it is different from the marketed product nowadays. When an object slips or is going slip with another object, on the two contact faces will create a relative action. This relative action is called the static friction, it creates the abrasion after use a certain time. The preset torque of adapter may get low due to this abrasion.

How to judge?

- +/-10% allowance for torque adapter is acceptable.
- Please check it on Torque analyzer or measurement.

3 Seats Magnet Tool Stand

- ✓ Quick and fix on anywhere with metal surface.
- ✓ Acrylic material with magnet support up to 1 kg.
- ✓ All SLOKY screwdrivers can be fit with.


Part No.: 9999-TPK-03S



▲ Not include torque screwdriver


User Guide

The tips of using different handle

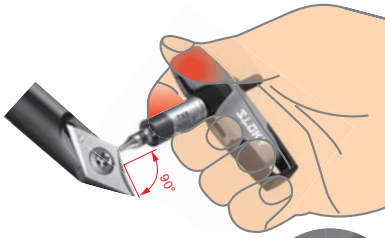

Large support areas for thumb and index finger on the ergonomically shaped handles.

The transmission of high torques is thus quite simple. Cylindrical handle shaft for quick turning of screws.



The Slim Fit handle has been designed to fit snugly in your hand, making blisters and calluses a thing of the past, even after intensive use.

The handle hard zones allows the hand to easily glide during hand repositioning. The soft zones ensures full force transfer through the grip.



The T Flying handle is needed whenever particularly high torque for loosening or tightening jobs needs to be applied.


The power is transferred positively, there is no frictional loss between the hand and the handle.

Simple operation



All adapters with magnetic, the bits can be inserted and automatically locked into the adapters.

Exchange bits system with colour coding

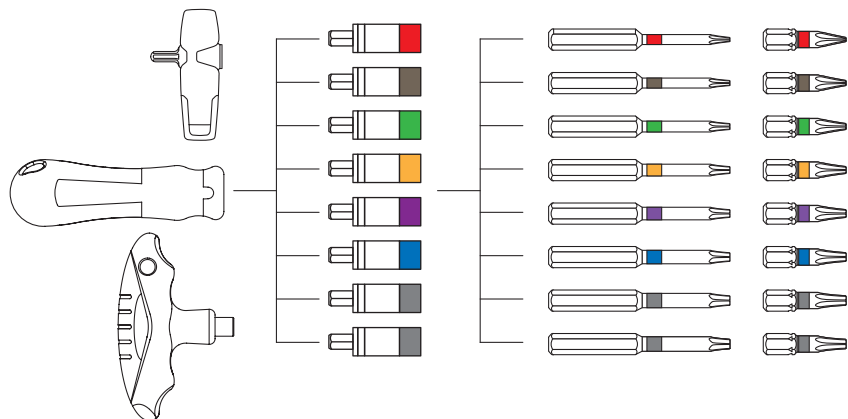


A Secure hold~ you'll never second-guess

A precision torque tool is only as good as its results. With proper testing equipment and system, we can ensure you never have to question our products' accuracy and quality.

SCHATZ® ANALYSIS / The precise laboratory system
Schatz AG of Germany torque testing equipment.



▲ Rockwell Hardness tester



JIMMORE International Corp.

